

Rapidport/4[®]

USB Dial-Up Remote Access

Easy Plug and Play modem expansion with remote access for Windows[®].




Overview

The Rapidport/4 four-port USB modem module is a flexible USB based remote access solution for Windows platforms. This external, user-installable solution plugs into an existing USB port of a PC, thin client or server, providing four 56K V.92 modems. Rapidport/4 gives network users access to ISP, fax and other dial-up applications supported by Windows operating systems.

This scalable solution includes a built-in USB hub, enabling users to daisy-chain up to five Rapidport/4 units for up to 20 modems from a single USB port on a PC or server. The downstream USB port may be used to connect and power any 500 mA USB peripheral device, including Edgeport[®] USB-to-serial converters for instant I/O expansion.

Feature-rich design, extensive operating system support and reliable performance make Rapidport/4 ideal for mission-critical enterprise applications.

Related Products



Acceleport RAS[®]



Edgeport[®]


Application Highlight

Server

Rapidport/4[®]



USB



56K V.92
Modem Ports



PSTN

Remote Access

Features/Benefits


- Four 56K V.92 USB modems in a single chassis
- Combine existing modem lines into a Windows[®] modem pool
- Give network users access to ISP, fax and other group dial-up applications supported by Windows operating systems
- On-board USB hub to stack and daisy-chain up to 5 Rapidport/4 units per system
- Lower total cost of ownership with user-installable, external solution – no need to open the chassis, reconfigure and reboot



Specifications

Rapidport/4®

Modem Features	
Ports	4 x 56K modems with RJ-11 connectors
Modem Standards	Data: 56K V.92, V.90 and enhanced V.34 Error correction: V.42 Data compression: MNP® Class 5; V.42bis Fax: V.17, Group 3, Class 1 and 2
USB Features	
Ports	On-board USB hub (Type A downstream connector): Stack and daisy-chain up to 5 Rapidport/4 units; Connect Edgeport USB-to-serial converter for serial device connectivity
Version	USB 1.1 and USB 1.0 compatible; Backward compatibility for USB 2.0
Cables	Includes 1-meter USB cable
General Features	
Power	Individual port power management; 10-26 VDC powered models for mobile applications; 500 mA downstream power available per port; Locking power connector
Operating Systems	Linux®, Windows Vista®, Windows Server® 2008, Windows XP®, Windows® XP Embedded, Windows NT® 4.0, Windows CE, Windows Server® 2003, Windows 2000
LEDs	Front panel LEDs display modem and hub status
Dimensions (L x W x H)	4.35 in x 7.20 in x 1.03 in (11.05 cm x 18.29 cm x 2.61 cm)
Weight	11.00 oz (311.84 g)
Other	No additional IRQ or memory address requirements; Rack-mountable; Plug and Play
Power Requirements	
Power Input	Ships with plug-mounted 120/230VAC 60/50 Hz at 5VDC @ 3 Amps max
Environmental	
Operating Temperature	0° C to 40° C (32° F to 104° F)
Relative Humidity	0% to 95% (non-condensing)
Approvals	
Safety	EN60950, UL 1950, CSA 2.2 No. 950
Emissions/Immunity	CE, FCC Part 15 Class B, EN55022 Class B, EN50082-1

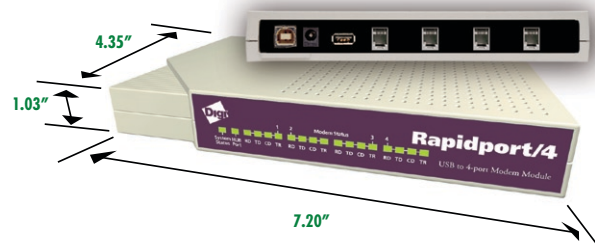

Visit www.digi.com for part numbers.

DIGI SERVICE AND SUPPORT - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. www.digi.com/support

Digi International
877-912-3444
952-912-3444
info@digi.com

**Digi International
France**
+33-1-55-61-98-98
www.digi.fr

**Digi International
KK**
+81-3-5428-0261
www.digi-intl.co.jp

**Digi International
(HK) Limited**
+852-2833-1008
www.digi.cn

BUY ONLINE • www.digi.com

91001225
C1/909

© 2003-2009 Digi International Inc.
All rights reserved. Digi, Digi International, the Digi logo, AccelePort, AccelePort RAS, Edgeport and Rapidport/4 are either trademarks or registered trademarks of Digi International, Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners.

